

## **BLAZE KING**

Sirocco 30 / Chinook 30

Ashford 30

Free Standing Wood Stoves

---







Sirocco 30 with Pedestal, Ash Drawer, painted Cast Iron Door and optional Convection Deck

# SIROCCO 30

**Classic Lines and Versatility** The Sirocco series embodies the timeless styling of the North American wood stove.

**Customize** You can customize your Sirocco 30 to match the decor of your home by choosing either the Pedestal or Cast Leg version. An optional Convection Deck is available (required when the optional fans are installed) which will increase the stoves performance. You can complete your styling preferences by choosing the available Satin Trim accents.


**Correct Firebox Size** It is important to pick the correct stove size to heat your home. At 2.75 cu. ft. the Sirocco, Chinook and Ashford 30 have larger sized fireboxes. All Blaze King catalytic stoves are thermostatically controlled which allows you to regulate the heat output, making them usable in a wide variety of home sizes.



Pedestal Ash Drawer



Optional Convection Deck



Optional Cast Iron Legs with Satin accent



Optional Cast Iron Door with Satin Trim and Satin Door Handle



Sirocco 30 with Cast Iron Legs and Door with optional Satin Trim, optional Convection Deck, and optional Ash Drawer.

Specifications: Sirocco 30	Optimum Performance (LHV)	Real World Tested Performance (HHV)
Maximum heat input**	447,760 BTU's	447,760 BTU's
Efficiency	81%	75% (EPA listed efficiency)
Constant Heat output on High***	36,269 BTU's/hour for 10 hours	33,582 BTU's/hour for 10 hours
Constant Heat output on Low***	12,090 BTU's/hour for up to 30 hours	11,194 BTU's/hour for up to 30 hours
Square Feet Heated°	1,100 – 2,400	
Maximum Log Size	18" (recommended 16")	
Burn Time°	Up to 30 hours on low	
Emissions (grams/hour)	0.97 g	
Firebox Size	2.75 cu. ft.	
Flue Size	6"	





Chinook 30 with optional  
Ash Drawer



Built-in Convection Deck for  
higher efficiencies



Satin Plated Bypass Handle



Optional Easy Glide Ash Drawer



Satin Plated Door Handle

# CHINOOK 30

**Design** The Chinook 30 has a modern European design with curved sides for a unique, soft appearance that will suit the decor of any modern home. The optional Ash Drawer is mounted on specially engineered runners that provide a smooth, gliding action. The Chinook 30, Sirocco 30 and Ashford 30 are amongst the cleanest wood stoves available at 0.97 g/hr particulate emissions. Their 2.75 cu.ft. firebox is capable of burning for up to 30 hours on low.



Chinook 30

Specifications: Chinook 30	Optimum Performance (LHV)	Real World Tested Performance (HHV)
Maximum heat input**	447,760 BTU's	447,760 BTU's
Efficiency	81%	75% (EPA listed efficiency)
Constant Heat output on High***	36,269 BTU's/hour for 10 hours	33,582 BTU's/hour for 10 hours
Constant Heat output on Low***	12,090 BTU's/hour for up to 30 hours	11,194 BTU's/hour for up to 30 hours
Square Feet Heated°	1,100 – 2,400	
Maximum Log Size	18" (recommended 16")	
Burn Time°	Up to 30 hours on low	
Emissions (grams/hour)	0.97 g	
Firebox Size	2.75 cu. ft.	
Flue Size	6"	



# ASHFORD 30

**Design** Our craftsmen used the timeless medium of cast iron to create a beautiful and elegant piece of furniture with detailed relief and curves. The Ashford is available in painted metallic black, chestnut high gloss enamel and midnight semi gloss enamel finishes.

Burled walnut is carved for the door and bypass handles. This creates a luxurious feel every time you use your stove. The adjustable, dual action door latch has a positive lock feel and is easy to operate.

The attention to detail is evident on the Ashford 30; for example the standard ash pan is mounted on easy glide runners for smooth refined operation.

You can detail your Ashford 30 with an optional decorative side shelf.



Ash drawer on easy glide rails



Strong character lines enhance the design



Ashford 30 Midnight Semi Gloss Enamel with optional Side Shelf



Ashford 30 Chestnut Enamel with optional Side Shelf




Ashford 30 Metallic Black Paint

## Ashford 30 Color Options



Black Metallic



Chestnut High Gloss Enamel



Midnight Semi Gloss Enamel



Burled walnut door handle with satin plated inset



Ornate leg detail

Specifications: Ashford 30	Optimum Performance (LHV)	Real World Tested Performance (HHV)
Maximum heat input**	447,760 BTU's	447,760 BTU's
Efficiency	81%	75% (EPA listed efficiency)
Constant Heat output on High***	36,269 BTU's/hour for 10 hours	33,582 BTU's/hour for 10 hours
Constant Heat output on Low***	12,090 BTU's/hour for up to 30 hours	11,194 BTU's/hour for up to 30 hours
Square Feet Heated°	1,100 – 2,400	
Maximum Log Size	18" (recommended 16")	
Burn Time°	Up to 30 hours on low	
Emissions (grams/hour)	0.97 g	
Firebox Size	2.75 cu. ft.	
Flue Size	6"	



Sirocco 30, Chinook 30, Ashford 30 Specifications

Sirocco 30, Chinook 30 and Ashford 30

Minimum Clearance to Combustibles (See owner's manual for complete list prior to install)		
A – Side Wall to Side of Unit	10¾"	
B – Rear Wall to Back of Unit	6"	
E – Adjacent Wall to Corner of Unit	4"	
J – Minimum Alcove Height	72"	
K – Horizontal Flue to Ceiling (USA)	18"	
(In Canada, if K=18", then J=79 ⅜")		
Hearth Protection		
G – Edge of Hearth Pad to Side of Unit (USA)	4" (USA)	8" (Canada)
H – Door opening to edge of ember protection	16" (USA)	18" (Canada)
I – Rear of stove to edge of ember protection	0" (USA)	8" (Canada)

\*Mobile Home: Must use Fan Kit or Rear Shield & Double Wall Pipe and Fresh Air Intake Kit  
\*Check Local Codes/Pipe Manufacturer Requirements for Clearances. In all of Canada and most of USA, 18" Clearances from single Wall Pipe are required.

Options

- Sirocco 30 Options**







  - Pedestal with Ash Drawer
  - Cast Iron Legs
  - Cast Iron Legs with Satin Accent
  - Ash Drawer for Leg Model
  - Cast Iron Door
  - Cast Iron Door with Satin Trim
  - Convection Deck
  - Dual Fan Kit (Requires convection Deck)
  - Fresh Air Kit
  - Rear Heat Shield
- Chinook 30 Options**

  - Ash Drawer with runners
  - Dual Fan Kit
  - Rear Heat Shield
  - Fresh Air Kit
- Ashford 30 Options**




  - Choice of colors - Black Metallic Paint, Midnight Semi Gloss Enamel or Chestnut Enamel
  - Side Shelf
  - Dual Fan Kit
  - Fresh Air Kit

Dimensions




Sirocco 30

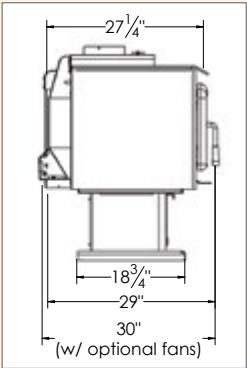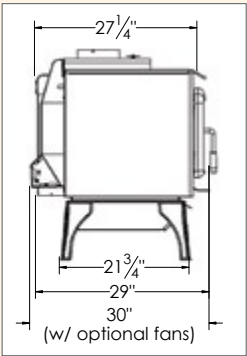

Chinook 30

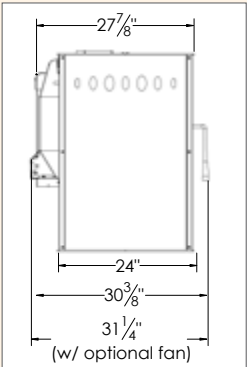




Ashford 30

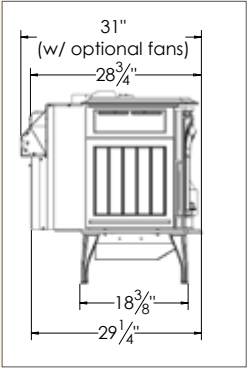




Clearances




Sirocco 30



Chinook 30



Ashford 30



Specification - Sirocco 30, Chinook 30 and Ashford 30	
Heating capacity - Sq. ft.	1,100 to 2,400
Wood length	18" (recommended 16")
Wood capacity (soft wood) - Lbs.	41
Wood capacity (hard wood) - Lbs.	58
Flue size	6"
Door opening	18 <sup>5</sup> / <sub>8</sub> " x 9 <sup>7</sup> / <sub>8</sub> "
Firebox depth (front to back)	18" (brick to brick); 20½" (brick to glass)
Firebox width	20"
Firebox height	12 <sup>3</sup> / <sub>4</sub> "
Firebox capacity - Cu. ft.	2.75
Emissions - Grams/hour	0.97
Maximum heat input*	447,760 BTU's
Heat output on high**	36,269 BTU's/hour for 10 hours
Low burn time°	Up to 30 hours
High burn time°	Up to 10 hours
Approximate weight – Sirocco	415 lbs. on pedestal, 385 lbs. on legs
Approximate weight – Chinook	450 lbs.
Approximate weight – Ashford	513 lbs.



Specification – Sirocco 30, Chinook 30 and Ashford 30		
	Optimum Performance	Average Performance
Maximum heat input	447,760 BTU's	447,760 BTU's
Efficiency	81% (B415)	75% (B415)
Constant Heat output on High	36,269 BTU's/hour for 10 hours	33,582 BTU's/hour for 10 hours
Constant Heat output on Low	12,090 BTU's/hour for up to 30 hours	11,194 BTU's/hour for up to 30 hours

\*You can fit 58lbs of wood into the Ashford 30, Chinook 30 and Sirocco 30 size firebox (2.75cu.ft.). Based on an EPA recognized equivalent of one pound of non-resinous wood equal to 8,500 BTU's and one pound of resinous wood equal to 9,700 BTU's per pound, giving a average of 9,100 BTU's per pound. (9,100 BTU's per lb. x 58lbs = 526,776 BTU's - 15% moisture content = 447,760 BTU's)

\*\*LHV 447,760 x 81% efficiency = 362,685 BTU's ÷ 10 hours = 36,269 BTU's. HHV 447,760 x 75% efficiency = 335,820 BTU's ÷ 10 hours = 33,582 BTU's.

\*\*\*LHV 447,760 x 81% efficiency = 362,685 BTU's ÷ 30 hours = 12,090 BTU's. HHV 447,760 x 75% efficiency = 335,820 BTU's ÷ 30 hours = 11,194 BTU's.

°Length of burn time, sq. ft. heated, Heat Output and BTU's depend on type of wood, moisture content, house insulation and climate conditions.

Burn Chart: Ashford, Sirocco, Chinook 30

The graph below shows the results of a test run by Blaze King Industries, Inc. on a Chinook 30 in November 2013. The lines on the graph represent how the stove performed during the test. The recordings were started when the combustor reached 640° F. The firebox was loaded with 58 lbs. of Western Larch. The thermostat was closed down to a low setting and the test was run on that single load.

A–The Blue line shows the weight of the wood or stored energy/potential

heat. The reduction in the weight of the wood load is greatest in the beginning as the moisture is boiled out of the wood. The blue line shows a very gradual & even reduction in the weight demonstrating the even heat output you can expect from a Blaze King catalytic wood

B–The Red line shows the temperature of the catalyst as it captures the energy that would normally escape up the flue in ordinary wood stoves. Twenty four hours into the burn, the wood collapses, releasing previously unburned gases and smoke. This release of energy increases firebox temperatures and supplies more fuel to the catalyst. Note the thermostat


responds, controlling the air intake to the fire, automatically maintaining the desired & prescribed low burn setting.

C–The Green line shows the flue temperature. The interaction of the combustor and the automatic thermostat makes your Blaze King one of the most efficient wood stoves in the world. The proof is in our flue temperatures. Ordinary stoves have flue temperatures of between 600°F and 900° F while your Blaze King flue temperature remains around 300° F. Ordinary stoves loose valuable heat up the flue. Blaze King catalytic stoves keep the heat in the home saving money and work. By making your stove

this efficient you will burn up to 33% less wood. This is a major advantage that only a Blaze King offers.

Note: After 37 hours of continuous burning, the combustor temperature starts to fall below 550° F having run out of fuel (gases) and becomes inactive. The fire is not completely out as there is still a hot bed of coals in the stove ready to ignite the next load of wood.

For additional information on burning your Blaze King wood stove go to [www.blazeking.com](http://www.blazeking.com).

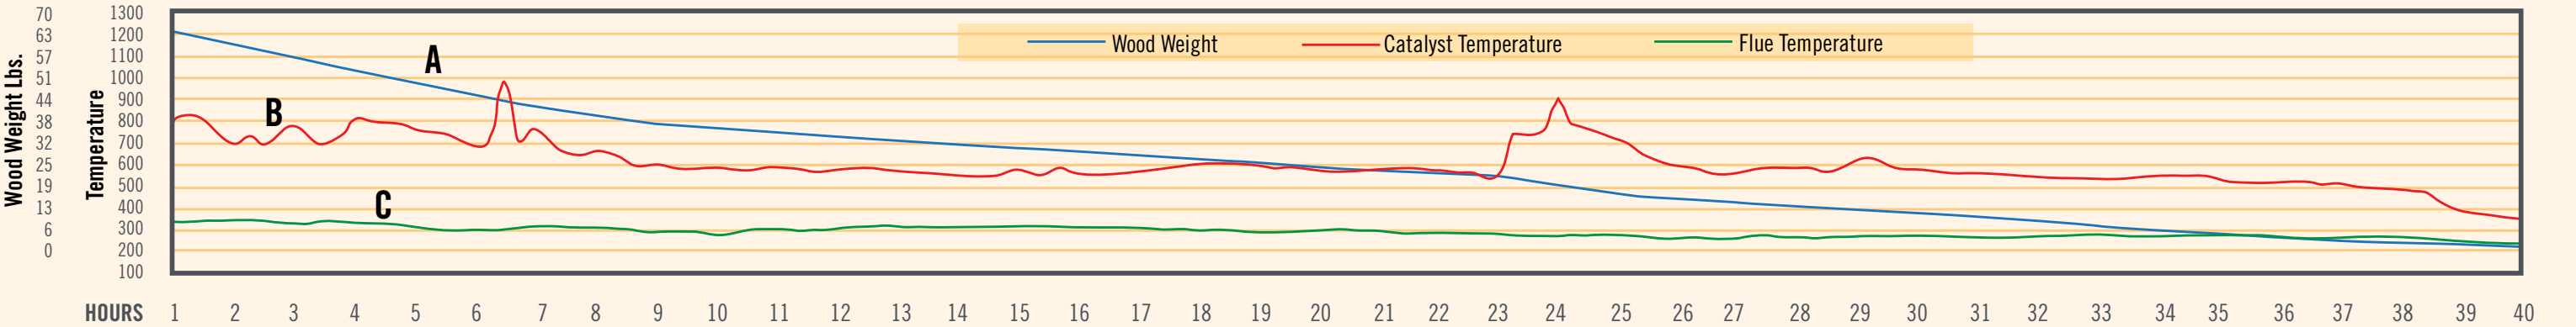

# BLAZE KING

## Sirocco 30, Chinook 30, Ashford 30 Features



**Catalytic Technology** Blaze King has been making large wood stoves for 35 years. Over this time period we have built a tradition of craftsmanship and performance that is unequalled. In 1983 Blaze King invented the first hybrid wood stove using air tubes and a catalytic converter. A year later Blaze King received the first certificate of compliance, number 001, for the first clean burning wood stove in North America. We received this certificate from the Oregon Department of Environmental Air Quality which was a forerunner to today's regulatory body, the EPA. A refined version of this technology is what you see in every catalytic Blaze King today.



**Thermostat control (No electricity required)** Blaze King's built-in thermostat constantly monitors the heat output of your stove. It automatically adjusts the air required for combustion. This unique technology, where we combine the efficiencies of a catalytic combustor with a built-in thermostat, provides the longest burn times of any wood stove. You get a full night's sleep without having to reload your stove. It also means that when you return from work, your stove is still hot and your home is warm.



**70% turn down** Fine-tuned automatic airflow, as our thermostat and catalyst work in tandem, allows you to turn down your Blaze King catalytic stove by up to 70%.

Non Blaze King stoves only turn down by 33% and have little control over their heat output. Because of this most people use expensive electric heat in the spring and fall because they cannot control the heat output of their secondary air wood stove.

With a 70% turn down ability a Blaze King is perfect to heat your home in the shoulder season saving you money on heating costs.



**Easy to operate** Light a fire as per the instructions in your owner's manual. After you have established a good fire and the thermometer needle is well into the active zone simply select your heat setting. Your Blaze King will now automatically control the heat from your stove until you need to load it again, which could be up to 40 hours later depending on the model you selected.

**Burn 33% less wood** The combination of our exclusive thermostat and catalytic combustor technology makes your Blaze King stove one of the most efficient wood stoves in the world. The proof of this is in our flue temperatures. Non Blaze King stoves have flue temperatures of between 600° F and 900° F while your Blaze King flue temperatures are between 150° F and 300° F. Non Blaze King stoves pump valuable heat up the flue. Your Blaze King catalytic stove keeps the heat in your home saving you money. By making your stove this efficient you will burn up to 33% less wood, cut, stack, load and clean 33% less wood. This is a major advantage that only a Blaze King offers.

**Less Cleaning** All Blaze King stove's produce very fine ash because we extract every last drop of energy from the wood. As a result you can go for very long periods before you have to empty your stove.

**Door Design** Every Blaze King has a steel frame around the door opening. Not only does this add strength to the firebox, but it creates a tight seal as it is pressed into the door gasket. Our engineers built the door latch so it is adjustable. You can adjust the tension on the gasket thus reducing the need for expensive replacements. The latch is also more durable because it is placed on the outside of the firebox.

**Close Clearances** The unique design of a Blaze King makes it possible for it to be placed tightly into a corner. Close clearance options allow for more versatile installs. The Chinook, Sirocco and Ashford stoves all have a double layer of bricks at the bottom of the firebox. As a result, all that is needed for floor protection is a spark protector and not a thermal rated hearth pad. This will save you hundreds of dollars on your installation costs.

**10 Year Extended Warranty** Because we believe in the technology and craftsmanship built into every Blaze King stove we are pleased to offer a 10 year extended warranty on your catalytic combustor beginning in 2012.

Blaze  King  
www.blazeking.com

